



MT300-CTC

FEATURES :

- ✓ Embedded mounting Mortice Lock
- ✓ Suitable for Sliding Door Application
- ✓ Reed Contact Monitoring Output
- ✓ Dual Voltage Selectable (12VDC / 24VDC)
- ✓ Reliable Holding Force
- ✓ Durable & Silence Operation
- ✓ Surge & Spike Protection PCBA
- ✓ Full Range of Optional Brackets
- ✓ Zero Residual Magnetism Design


SPECIFICATIONS :

- 1 Voltage Input : 12 VDC / 24 VDC
- 2 Current Draw : 12V / 300mA ; 24V / 150mA (±5%)
- 3 Holding Force (Max) : Up to 300 lbs (136 kg)
- 4 Dry Reed Contact (Max) : 30Vdc, 0.1A, 3W
- 5 Anti-Rust Surface Treatment : Blue Zinc Plating
- 6 Operating Temperature : 0~55° C (32~131° F)
- 7 Operating Humidity : 0~95% (non condensing)
- 8 Weight : 0.5 kg (±1%)
- 9 Dimensions : Magnet - (L)174x(W)32x(T)26 mm
Armature - (L)130x(W)33x(T)11 mm

EBELCO 300 series electromagnetic locks are known with its excellent holding force and the remarkable features.


The series compliance to CE and are manufactured under the highest quality control to achieve the commitment to customer who always satisfied with the maximum quality and reliability.

MORTICE LOCK C/W PCB CONNECTION

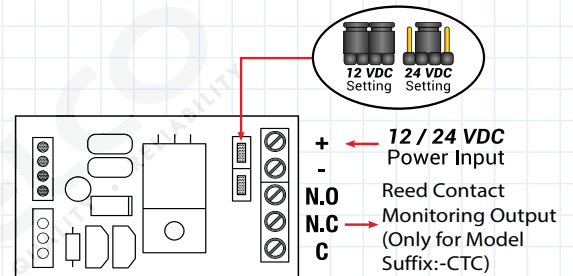

IMPORTANT !

Set the jumper position according to the power input correctly before switch ON the power.

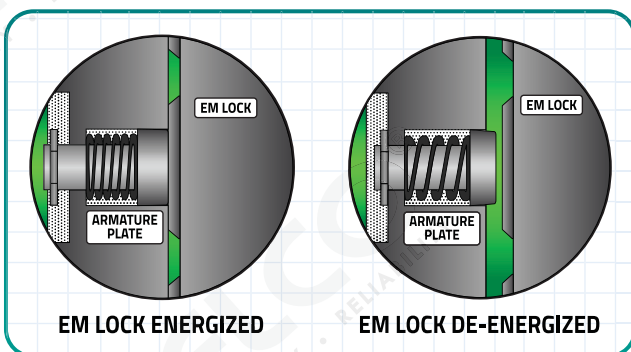

*Disclaimer :

EBELCO reserve the right to go ahead with any modifications of the models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.

